

Research Open Access

A New Generalized Computational Technique for Simulation of Differential Equations in Chemical and Process Engineering

Anselem.C Orga¹, McDon Ejike Obi^{2,*} Nwaozuzu S.C¹, Obibuenyi J.I¹, Muoghalu I.P¹

¹Department of chemical engineering, Federal University of Technology, Owerri, Imo State, Nigeria ²University of Technology, Sydney, Australia

*Corresponding author: McDon Ejike Obi, University of Technology, Sydney, Australia; E-mail: mcdon.obi@gmail. com

Received Date: July 20, 2018; Accepted Date: August 28, 2018; Published Date: September 03, 2018

Citation: Anselem.C Orga (2018) A New Generalized Computationaltechnique for Simulation of Differential Equationsin Chemical and Process Engineering. J Chem Proc Eng 3: 1-12.

Abstract

Most physical and chemical processes encountered in chemical and process engineering often lead to differential equations which are as varied as the complex mass, momentum and energy transport processes they represent. Thus finding/selecting the appropriate one to use in any given situation is not an easy task. Following the realization that the solution of any differential equation can be generally expressed as a polynomial (truncated power series) which can be regressed by the least square method, and the coefficients of the regressed model linked to that of the binomial formula led to a generalized computational procedure for solving a wide-range of differential equations in chemical and process engineering (both initial and boundary value problems). The method was found to be computationally efficient and inexpensive as it is fast converging and free from rounding off errors and overshoot.

Keywords: Physical and chemical processes; Differential equations, initial and boundary value problems; least square regression analysis; binomial formula; computational procedure

Introduction

Differential equations-used in most science and engineering analysis- are particularly important in modeling chemical engineering systems. As the physical and chemical laws governing these processes (heat, mass, and momentum transfer) are complex, as well as the chemical reactions, reaction heat, adsorption, desorption, phase transition, multiphase flow, etc,associated with them, so also are the differential models arising from them and include:, homogeneous/non-homogeneous, linear/non-linear, constant/variable coefficients, 1st, 2nd or higher orders, and systems of simultaneous differential equations. Numerous methods have been developed for solving them. They include:

- Exact methods such as Method of undetermined coefficients, Integrating factor, Method of variation of parameters/separation of variables[1,2].
- Approximate (but convergent) methods such as Successive Approximations, Perturbation Theory, Multiple scale Analysis, power series solutions, Generalized Fourier series/orthogonal functions [3].

©2018 The Authors. Published by the JScholar under the terms of the Creative Commons Attribution License http://creativecommons.org/licenses/by/3.0/, which permits unrestricted use, provided the original author and source are credited.

 Numerical methods such as: Euler methods; Trapezoidal rule; Runge-Kutta methods; Finite difference methods; Finite element methods, gradient discretisationmethods[4-18].

Numerical techniques are particularly important since most realistic deferential equations in chemical and process engineering do not have exact analytic solutions, therefore, approximate/numerical techniques, such as Runge-Kutta, Euler, Newton gradient methods, finite difference/element) are used extensively. These methods have proven rather successful in dealing with both linear and nonlinear problems as well as initial boundary problems (IVP) and boundary value problems (BVP). Despite these obvious advantages, they have some demerits. Since they involve discretization, they have rounding off errors and are computationally expensive, and in some cases will not converge to the true solution.

A particular generalized procedure which is used to grind most differential equations is the Power Series Method(PSM) (https://www.researchgate.net/publication/293652327). This method has proven rather successfulin dealing with both linear as well as nonlinear problems, as it yields analytical solutions andoffers certain advantages over standard numerical methods. It is free from rounding off errorssince it does not involve discretization, and is computationally inexpensive. In spite of the advantages of PSM, it has some drawbacks, the major one being that it cannot handle boundary value problems, as it can only handle initial value problems. Thus finding/selecting the appropriate one to use in any given situation is not an easy task.

In this article, we present a more generalized computational approach, which is amodification of PSMusing the Binomial formula/least square approximation, the goal being to use the same platform/procedure to simulate all differential equations in chemical and process engineering (both initial and boundary value problems), and to overcome the shortcoming of other methods.

Materials and Methods

Background and Motivating Examples

Usually we solve differential equations to obtain the value of the dependent variable in terms of independent variable/s, which are finally represented in graphs for better visualization and analysis. These solution curves are as varied as the differential equations they are representing. Thus the first step in unification/generalization is to find a general expression that can fit all data/graphs as accurately as possible. We know from statistics that any set of data (or expression) can be regressed by the general least square method [19,20], and generally, the higher the order of the regression, the more accurate the solution becomes. Thus to fit an appropriate equation to the data, we use regression analysis given generally as:

$$Y = a_0 + a_1X + a_2X^2 + a_3X^3 + ... + a_nX^n(1.1)$$

The coefficients, a_i, are found by least square method, applied to the X-Y data, which results in the matrix:

P	ΣΧ	ΣX^2	ΣX^3	$\Sigma X^{\rm n}$	a ₀		ΣΥ
ΣΧ	ΣX^2	ΣX^3	ΣX^4	ΣX^{n+1}	a ₁		ΣΧΥ
ΣX^2	ΣX^3	ΣX^4	ΣX^5	ΣX^{n+2}	a ₂		$\Sigma X^2 Y$
ΣX^3	ΣX^4	ΣX^5	ΣX^6	ΣX^{n+3}	a ₃	=	$\Sigma X^3 Y$
:	:	:	:	:	:		:
:	:	:	:	:	:		:
ΣX^n	ΣX^{n+1}	ΣX^{n+2}	ΣX^{n+3}	ΣX^{n+n}	a _n		$\Sigma X^n Y$

Similarly the solution of any differential equation can be expressed and regressed as a polynomial of the eq.1 form. Notice that polynomials are simply finite or truncated power series. That is a polynomial is a power series where the coefficients, \mathbf{a}_i beyond a certain point are all zero. Thus the coefficients of the polynomial can be found by manipulating power series by differentiation and theuse the Taylor series expansion. These manipulations will lead to a recurrent relation- recursion equation- given as:

$$(k+2)(k+1)a_{k+2} + \sum_{j=0}^{k} (k-j+1)p_j a_{k-j+1} + \sum_{j=0}^{k} q_j a_{k-j} = 0.$$
 (2.1)

The above equation is called a recurrence relation for the coefficients of the power series. For instance the first three equations of the relation are:

(constant term):
$$2a_2 + p_0a_1 + q_0a_0 = 0$$
, (coefficient of x): $3 \cdot 2a_3 + 2p_0a_2 + p_1a_1 + q_0a_1 + q_1a_0 = 0$, (coefficient of x^2): $4 \cdot 3a_4 + 3p_0a_3 + 2p_1a_2 + p_2a_1 + q_0a_2 + q_1a_1 + q_2a_0 = 0$, (2.4)

Hence, once the first two coefficients, a_0 and a_1 , are known(which are actually the initial boundary conditions) then all other coefficients are determined by the recurrence relation. Thus PSM is limited to only initial boundary value (IVP) problems as it cannot handle boundary value problems (BVP) because of its recursive nature. In a nutshell,

the method admits a polynomial expression as the solution of the differential equation, which when differentiated and substituted into the differential equation gives a recurrence relation-recursive formula, which by knowing the initial boundary conditions, gives the coefficients of the polynomial expression, hence the solution of the differential equation. This approach is adopted, with some modifications, in solving differential equations(both initial and boundary value problems). All that is needed is to find the right order and the right parameters(coefficients) of the polynomial expression(representing the differential equation); by modeling/numericalanalysis as this work shows.

Modeling

(1.2)

Let us start with a general second order linear ODE with both constant and variable coefficients as follows:

$$(k_0 + k_1 t + k_2 t^2) d^2 Y / dt^2 + (k_3 + k_4 t) dY / dt + k_5 Y + f(t) + k_6 = 0(3)$$

Notice that eq.3reduces to first order when $k_0 = k_1 = k_2 = 0$. The solution can be regressed and given in terms of the general regression expression (eq.1), thus:

$$y = a_0 + a_1 t + a_2 t^2 + a_3 t^3 + a_4 t^4 + a^5 t^5 + \dots + a_{n-2} t^{n-2} + a_{n-1} t^{n-1} + a_n t^n(4)$$
And

$$\frac{dy/dt = a_1 + 2a_2t + 3a_3t^2 + 4a_4t^3 + 5a_5t^4 + ... + (n-2)a_{n-2}t^{n-3} + (n-1)a_{n-1}t^{n-2} }{+na_nt^{n-1}\left(5\right)}$$

$$d^2y/\ dt^2 = 2a_2 + 6a_3t + 12a_4t^2 + 20a_5t^3 + \ldots + (n-3)(n-2)a_{n-2}t^{n-4} +$$

$$(n-2)(n-1)a_{n-1}t^{n-3}+(n-1)n.a_nt^{n-2}$$
 (6)

substituting eqs 4 to 6 into eq.3:

$$(k_{_0}+k_{_1}+\ k_{_2})\ (2a_{_2}+6a_{_3}t\ +\ 12a_{_4}t^2\ +\ 20a_{_5}t^3\ +\dots\ +\ (n\text{-}3)(n\text{-}2)a_{_{n\text{-}2}}t^{n\text{-}4}\ +\ (n\text{-}2)(n\text{-}1)a_{_{n\text{-}1}}t^{n\text{-}3}\ +$$

$$(n\text{-}1)n.a_nt^{n\text{-}2}) + (k_3 + k_4) (a_1 + 2a_2t + 3a_3t^2 + 4a_4t^3 + 5a_5t^4 + ... + (n\text{-}2) a_{n\text{-}2}t^{n\text{-}3} +$$

$$\begin{split} &(n\text{-}1)a_{n\text{-}1}t^{n\text{-}2} + na_nt^{n^{-}1}) + k_5(+\ a_1t + a_2t^2 + a_3t^3 + a_4t^4 + a^5t^5 + \ldots + a_{n\text{-}2}t^{n\text{-}2} + a_{n\text{-}1}t^{n\text{-}1} + a_nt^n) + f(t) + k_6 = 0 \end{split}$$

 $f_{\rm i}(t)$ can be any function of t namely: linear, nonlinear, exponential, trigonometric,Logarithmic, or their combinations. Whatever the form or forms of f(t), the general procedure is to remodel and express in terms of polynomial expressions within the solution interval, using the least square regression analysis already explained. Thus:

$$f_{i}(t) = \boldsymbol{\alpha}_{0} + \boldsymbol{\alpha}_{1}t + \boldsymbol{\alpha}_{2}t^{2} + \boldsymbol{\alpha}_{3}t^{3} + \dots \boldsymbol{\alpha}_{m,1}t^{m-1} + \boldsymbol{\alpha}_{m}t^{m} \qquad m \leq n \ (8)$$

combining eqs.7 and 8 and expressing in descending powers of t (for m=n) implies:

$$[n(n-1)k_{_{1}}+nk_{_{4}}+k_{_{5}})a_{_{n}}+\boldsymbol{\alpha}_{_{n}}]t^{_{n}}+[\{n(n-1)k_{_{1}}+nk_{_{3}}\}a_{_{n}}+(n-1)(n-2)k_{_{2}}+(n-1)k_{_{4}}+k_{_{5}}\}a_{_{n-1}}$$

$$+ \boldsymbol{\alpha}_{n-1}]t^{n-1} + \dots + [20k_2 + 5k_4 + k_5)a_5 + \boldsymbol{\alpha}_5]t^5 + [(20k_1 + 5k_3)a_5]t^5 + (20k_1 + 5k_3)a_5$$

+
$$(12k_2 + 4k_4 + k_5)a4 + \boldsymbol{\alpha}_4 t^4 + [20k_0 a_5 + (12k_1 + 4k_3)a_4 + (6k_2 + 3k_4 + k_5)a_5 + \boldsymbol{\alpha}_5 t^3$$

+
$$[12k_0a_4 + (6k_1 + 3k_3)a_3 + (2k_2 + 2k_4 + k_5)a_2 + \alpha_2]t^2 + [6k_0a_3 + (2k_1 + 12k_5)a_3]t^2$$

+
$$(k_4 + k_5)a_1 + \boldsymbol{\alpha}_1]t + [2k_0a_2 + k_3a_1 + k_5a_0 + k_6 + \boldsymbol{\alpha}_0] = 0(9)$$

Thus dividing eq.7 by $[n(n-1)k_2+nk_4+k_5)a_n+\alpha_n]$ to make the tⁿ coefficient, unityand rearranging:

$$t^{n} + [\{n(n-1)k_{_{1}} + nk_{_{3}}\}a_{_{n}}/ + (n-1)(n-2)k_{_{2}} + (n-1)k_{_{4}} + k_{_{5}}\}a_{_{n-1}} + {\color{red}\alpha_{_{n-1}}}]t^{n-1}/[n(n-1)k_{_{3}} +$$

$$nk_{4} + k_{5})a_{n} + \boldsymbol{\alpha}_{n}] + \dots + [20k_{2} + 5k_{4} + k_{5})a_{5} + \boldsymbol{\alpha}_{5}]t^{5}/[n(n-1)k_{2} + nk_{4} + k_{5})$$

$$a_{n} + \boldsymbol{\alpha}_{n}] +$$

$$[(20k_{_1}+5k_{_3})a_{_5}+(12k_{_2}+4k_{_4}+k_{_5})a4+\boldsymbol{\alpha}_{_4}]t^4/[n(n-1)k_{_2}+nk_{_4}+k_{_5})a_{_n}+\boldsymbol{\alpha}_{_n}]/[n(n-1)k_{_5}$$

$$+nk_{_{4}}+k_{_{5}})a_{_{n}}+\boldsymbol{\alpha}_{_{n}}]+[20k_{_{0}}a_{_{5}}+(12k_{_{1}}+4k_{_{3}})a_{_{4}}+(6k_{_{2}}+3k_{_{4}}+k_{_{5}})a_{_{3}}+\boldsymbol{\alpha}_{_{3}}]\\t^{_{3}}/[n(n-1)k_{_{5}}$$

$$+nk_{_{4}}+k_{_{5}})a_{_{n}}+\boldsymbol{\alpha}_{_{n}}]+\left[12k_{_{0}}a_{_{4}}+(6k_{_{1}}+3k_{_{3}})a_{_{3}}+(2k_{_{2}}+2k_{_{4}}+k_{_{5}})a_{_{2}}+\boldsymbol{\alpha}_{_{2}}\right]$$

$$t^{2}/[n(n-1)k_{_{3}}$$

$$+nk_{_4}+k_{_5})a_{_n}+\boldsymbol{\alpha}_{_n}]+[6k_{_0}a_{_3}+(2k_{_1}+12k_{_3})a_{_2}+(k_{_4}+k_{_5})a_{_1}+\boldsymbol{\alpha}_{_1}]t/[n(n-1)k_{_2}+nk_{_4}+k_{_5})a_{_n}+\boldsymbol{\alpha}_{_n}]$$

+
$$[2k_0a_2 + k_3a_1 + k_5a_0 + k_6 + \boldsymbol{\alpha}_0]/[n(n-1)k_2 + nk_4 + k_5)a_n + \boldsymbol{\alpha}_n] = 0(10)$$

Usually the range of values of independent variable,t is given or specified over an interval $t_n \le t \le t_n$. Thus:

$$t = t_0 t_1 t_2 t_3, ---, t_n (11)$$

therefore

$$t - t_0 = t - t_1 = t - t_2 = t - t_3 = \dots = t - t_n = 0$$
 (12)

This implies that:

$$t - t_i = 0i = 0, 1, 2, 3, ..., n(13)$$

Thus

$$(t - t_i)^n = 0t_0 \le t_i \le t_n (14)$$

Eqs. 10 and 14 are equivalent. This realization/discovery that eqs.10 and 14 are equivalent is the key to new computational method for generalization of the method of simulating differential equations (both IVP and BVP). Thus the parameters or coefficients of eq.14 are linked to those of eq.10using binomial formula:

(a + b)ⁿ =
$$\sum n!/\{k!(n-k)!\} b^k a^{n-k}$$
 (15)

By comparing with eq.15, eq.14 becomes:

$$(t - t_i)^n = \sum (-1)^k n! / \{k! (n-k)!\} t_i^k t^{n-k} (16)$$

Expansion of eq.16 yields:

$$(t-t_i)^n=t^{n-} n!/\{(n-1)!\} \ t_i \ t^{n-1} + n!/\{2(n-2)!\} \ t_i^2 \ t^{n-2} - n!/\{6(n-3)!\} \ t_i^3 \ t^{n-3} + n!/\{24(n-4)!\} \ t_i^4 \ t^{n-4}$$

$$+ \dots \dots + (-1)^{n-4} \; n!/\{(n-4)!(n+4)!\} \; t_i^{n-4} \; t^4 + \; (-1)^{n-3} \; n!/\{(n-3)!(n+3)!\} \\ t^{n-3} \; t^3$$

$$+ \ (-1)^{n\cdot 2} \ n!/\{n-2)!(n+2)!\} \ t_i^{n\cdot 2} \ t^2 + \ (-1)^{n\cdot 1} \ n!/\{(n-1)!(n+1)!\} \ t_i^{n\cdot 1} \ t + (-1)^n \ t_i^{n} \ (17)$$

Thus eq.17 and eq.10 are equivalent, and term by term comparison result in the following equations that linked their coefficients:

$$[2k_{0}a_{2} + k_{3}a_{1} + k_{5}a_{0} + k_{6} + \boldsymbol{\alpha}_{0}]/ [n(n-1)k_{2} + nk_{4} + k_{5})a_{n} + \boldsymbol{\alpha}_{n}] = (-1)^{n} t_{i}^{n}$$
 (18.1)

$$[6k_{0}a_{3} + (2k_{1} + 12k_{3})a_{2} + (k_{4} + k_{5})a_{1} + \boldsymbol{\alpha}_{1}]t/[n(n-1)k_{2} + nk_{4} + k_{5})a_{n} + \boldsymbol{\alpha}_{n}]$$

$$= (-1)^{n-1} n!/\{(n-1)!(n+1)!\} t_{1}^{n-1}$$
(18.2)

$$[12k_{0}a_{4}+(6k_{1}+3k_{3})a_{3}+(2k_{2}+2k_{4}+k_{5})a_{2}+\boldsymbol{\alpha}_{2}]t^{2}/[n(n-1)k_{2}+nk_{4}+k_{5})$$
 $a_{n}+\boldsymbol{\alpha}_{n}]$

$$= (-1)^{n-2} n!/\{n-2\}!(n+2)!\} t_i^{n-2}$$

$$(18.3)\{k_2[20k_0a_5 + (12k_1 + 4k_3)a_4 + (6k_2 + 3k_4 + k_5)a_3 + \boldsymbol{\alpha}_3]t^3 '/[n(n-1)k_2 + nk_4 + k_5)a_n + \boldsymbol{\alpha}_n]$$

$$= (-1)^{n-3} n!/\{(n-3)!(n+3)!\} t_i^{n-3}$$

$$(18.4)$$

$$[(20k_1 + 5k_3)a_5 + (12k_2 + 4k_4 + k_5)a_4 + \alpha_4]t^4/[n(n-1)k_2 + nk_4 + k_5)a_n + \alpha_2]$$

/
$$[n(n-1)k_2 + nk_4 + k_5)a_n + \alpha_n] = (-1)^{n-4} n!/\{(n-4)!(n+4)!\} t_i^{n-4}$$
(18.5)

.

$$[\{n(n\text{-}1)k_{_{1}}+nk_{_{3}}\}a_{_{n}}/+(n\text{-}1)(n\text{-}2)k_{_{2}}+(n\text{-}1)k_{_{4}}+k_{_{5}}\}a_{_{n\text{-}1}}+\boldsymbol{\alpha}_{_{n\text{-}1}}]t^{n\text{-}1}$$

$$/[n(n-1)k_1+nk_4+k_5)a_1+\alpha_1]=-n!/\{(n-1)!\}$$
 t₁(18.n)

Thus there are n-equations (eqs. 18.1 to 18.n) with n+1 unknown parameters, a_0 , a_1 , a_2 , a_3 , a_4 , a_5 , ..., a_n thereby requiring additional equation/s, which are found from the boundary conditions of the problem. Usually the boundary conditions can be one(for IVP of first order) or two (for BVP of first order and IVP/BVP of second order). Let us consider the two cases, and clearly visualize the procedures by considering n=5. Thus for n=5, eq.18 set reduces to:

$$[2k_{0}a_{2} + k_{3}a_{1} + k_{5}a_{0} + k_{6} + \boldsymbol{\alpha}_{0}] = [(20k_{2} + 5k_{4} + k_{5})a_{5} + \boldsymbol{\alpha}_{5}](-1t^{5})(19.1)$$

$$[6k_{0}a_{3} + (2k_{1} + 12k_{3})a_{2} + (k_{4} + k_{5})a_{1} + \boldsymbol{\alpha}_{1}] = [(20k_{2} + 5k_{4} + k_{5})a_{5} + \boldsymbol{\alpha}_{5}](5t^{4})(19.2)$$

$$\begin{split} &[12k_0a_4+(6k_1+3k_3)a_3+(2k_2+2k_4+k_5)a_2+\boldsymbol{\alpha}_2] = &[(20k_2+5k_4+k_5)a_5+\boldsymbol{\alpha}_5](-10t^3)(19.3) \ \{k_2 \ [20k_0a_5+(12k_1+4k_3)a_4+(6k_2+3k_4+k_5)a_3+\boldsymbol{\alpha}_3] \\ =&[(20k_2+5k_4+k_5)a_5+\boldsymbol{\alpha}_5] \ (10t^2)(19.4) \end{split}$$

$$[(20k_1 + 5k_3)a_5 + (12k_2 + 4k_4 + k_5)a_4 + \boldsymbol{\alpha}_4] = [(20k_2 + 5k_4 + k_5)a_5 + \boldsymbol{\alpha}_5]$$
 (-5t)(19.5)

Thus we have five equations (eq.19.1 to 19.5) with six unknowns $(a_0$ to a_6). The remaining equation/s will come from the boundary conditions as follows:

Case 1: One point boundary value problem.

for 1^{st} order IVP, where $Y(\tau)$ is given, thereby giving one boundary equation, eq.4 in terms of the boundary condition provides the remaining equation (for n=5) as:

$$Y(\tau) = a_0 + a_1\tau + a_2\tau^2 + a_2\tau^3 + a_4\tau^4 + a_5\tau^5$$
(19.6)

Rearrangingeqs. 19.1 to 19.6 result in the following sample simulation matrix for one point IVP ODE's:

$-(0.k_2 + 0.k_4 + k_5)$	$-(0.k_1 + 1.k_3)$	-(2.k ₀)	0	0	$(20k_2 + 5k_4 + k_5)(-t_i^5)$	a ₀		$k_6 + \alpha_0 - \alpha_5(-t_i^5)$	
0	-(0.k ₂ + 1.k ₄ + k ₅)	$-(2.k_1 + 2.k_3)$	-(6.k ₀)	0	$(20k_2 + 5k_4 + k_5)(5t_i^4)$	a ₁		$\alpha_1 - \alpha_5 (5 t_i^4)$	
0	0	$-(2.k_2 + 2.k_4 + k_2)$	$-(6.k_1 + 3.k_3)$	-(12.k ₀)	$(20k_2 + 5k_4 + k_5)(-10 t_i^3)$	a ₂	=	$\alpha_2 - \alpha_5 \cdot (-10 t_i^3)$	
0	0	0	$-(6.k_2 + 3.k_4 + k_2)$	$-(12.k_1 + 4.k_3)$	-(20k0) + (20k2 + 5k4 + k5)(10 t12)	a ₃		$\alpha_3 - \alpha_5 \cdot (10 t_i^2)$	
0	0	0	0	-(12.k ₂ + 4.k ₄ + k _c)	$-(20k_1 + 5k_3) + (20k_2 + 5k_4 + k_5)$ $(-5 t_1)$	a ₄		$\alpha_4 - \alpha_5 \cdot (-5 t_i)$	
1	τ	$ au^2$	$ au^3$	$ au^4$	τ ⁵	a ₅		Υ(τ)	(20)

Case 2: Two points boundary value problem.

Similarly for BVP of first order ODE or both for IVP and BVP of second order ODE,s where $Y(\tau)$ and $Y'(\tau)$ or $Y(\boldsymbol{\tau}_1)$ and $Y'(\boldsymbol{\tau}_2)$ or $Y(\tau_1)$ and $Y(\tau_2)$ pairsare given, thereby given two boundary equations in each case as follows:

(i) $Y(\tau)$ and $Y'(\tau)$: from eqs. 4 and 5, the boundary value equations become:

$$Y(\tau) = a_0 + a_1 \tau + a_2 \tau^2 + a_3 \tau^3 + a_{41}^4 + a_5 \tau^5 (21.1)$$

And

$$Y'(\tau) = a_1 + 2a_2 \tau + 3a_3 \tau^2 + 4a_4 \tau^3 + 5a_5 \tau^4(21.2)$$

(ii) $Y(\tau_1)$ and $Y'(\tau_2)$: from eqs. 4 and 5, the boundary value equations become:

$$Y(\tau) = a_0 + a_1 \tau_1 + a_2 \tau_1^2 + a_3 \tau_1^3 + a_4 \tau_1^4 + a_5 \tau_1^5 (22.1)$$

And

$$Y'(\tau) = a_1 + 2a_2 \tau_2 + 3a_3 \tau_2^2 + 4a_4 \tau_2^3 + 5a_5 \tau_2^4 (22.2)$$

(iii) Y(τ ₁) and Y(τ ₂): from eq.4the boundary value equations become:

$$Y(\tau_1) = a_0 + a_1 \tau_1 + a_2 \tau_1^2 + a_3 \tau_1^3 + a_4 \tau_1^4 + a_5 \tau_1^5 (23.1)$$

And

$$Y(\tau_2) = a_0 + a_1\tau_2 + a_2\tau_2^2 + a_3\tau_2^3 + a_4\tau_2^4 + a_5\tau_2^5(23.2)$$

This implies we now have five-main equations (eqs.19.1 to 19.5) and two boundary equations (eqs. 21.1 and 21.2 or 22.1 and 22.2 or 23.1 and 23.2) with only six parameters (a_0 , a_1 , a_2 , a_3 , a_4 and a_5). Thus we need to reduce the main equations from n=5 to n-1=4 to accommodate the two equations from the boundary conditions. Thus eqs.19.1 to 19.4 are divided by eq.19.5 to give the required four equations as follows:

$$[2k_0a_2 + k_3a_1 + k_5a_0 + k_6 + \boldsymbol{\alpha}_0] = [(20k_1 + 5k_3)a_5 + (12k_2 + 4k_4 + k_5)a_4 + \boldsymbol{\alpha}_4] (-1t^5)/(-5t) (24.1)$$

$$\begin{split} &[6k_{0}a_{3}+(2k_{1}+12k_{3})a_{2}+(k_{4}+k_{5})a_{1}+\boldsymbol{\alpha}_{1}] = \\ &[(20k_{1}+5k_{3})a_{5}+(12k_{2}+4k_{4}+k_{5})a4+\boldsymbol{\alpha}_{4}] \ (5t^{4}) \ /(-5t) \ (24.2) \\ &[12k_{0}a_{4}+(6k_{1}+3k_{3})a_{3}+(2k_{2}+2k_{4}+k_{5})a_{2}+\boldsymbol{\alpha}_{2}] = \\ &[(20k_{1}+5k_{3})a_{5}+(12k_{2}+4k_{4}+k_{5})a4 \ \boldsymbol{\alpha}_{4}] \ (-10t^{3})/(-5t)(24.3) \\ &\{k_{2} \ [20k_{0}a_{5}+(12k_{1}+4k_{3})a_{4}+(6k_{2}+3k_{4}+k_{5})a_{3}+\boldsymbol{\alpha}_{3}] = \end{split}$$

$$[(20k_1 + 5k_3)a_5 + (12k_2 + 4k_4 + k_5)a_4 + \alpha_4] (10t^2) / (-5t)(24.4)$$

Rearranging and combining eqs.24.1 to 24.4 with the boundary value equations result in the following sample simulation matrix in each case as follows:

IVP:Y(τ) and Y'(τ)

$-(0.k_{2} + 0.k_{4} + k_{5})$	-(0. k ₁ + 1.k ₃)	-(2.k ₀)	0	$(12k_2 + 4k_4 + k_5)$ $(-t_i^{5})/$ $(-5 t_i)$	$(20k_1 + 5k_3)$ $(-t_i^5)$)/ $(-5 t_i)$	a ₀	$k_6 + \boldsymbol{\alpha}_0 - \boldsymbol{\alpha}_4(-t_i^5) / (-5 t_i)$
0	-(0.k ₂ + 1.k ₄ + k ₅)	-(2.k ₁ + 2.k ₃)	-(6.k ₀)	$((12k_{2}^{1} + 4k_{4} + k_{5}^{1}) + (5t_{1}^{4}))/$ $(-5t_{5}^{1})$	$(20k_1 + 5k_5)$ $(5 t_1^4)/$ $(-5 t_1)$	a ₁	$\boldsymbol{\alpha}_{1} - \boldsymbol{\alpha}_{4}(5 t_{i}^{4})$ $(-5 t_{i})$
0	0	$ \begin{array}{c} -(2.k_2 + \\ 2.k_4 + \\ k_5) \end{array} $	-(6. k ₁ + 3.k ₃)	$-(12.k_0) + (12k_2 + 4k_4 + k_5)) $ $(-10 t_i^3)/(-5 t_i)$	$(20k_1 + 5k_5)$ $(-10 t_i^3) / (5t_i)$	a ₂	$= \begin{array}{c} \boldsymbol{\alpha}_2 - \boldsymbol{\alpha}_4 (-10) \\ t_i \wedge 3) \\ (-5 t_i) \end{array}$
0	0	0	-(6.k ₂ + 3.k ₄ + k ₅)	$ \begin{array}{c} -(12.k_1 \\ + 4.k_3) + \\ (12k_2 + \\ 4k_4 + k_5) \\ (10 t_i^2)/\\ (-5 t_i) \end{array} $	-(20k0) + (20k ₁ + 5k ₅) (10 t _i ²)/ (-5t _i)	a ₃	$\boldsymbol{\alpha}_{3} - \boldsymbol{\alpha}_{4}(10)$ $t_{i}^{2} (-5 t_{i})$
1	τ	$ au^2$	τ^3	$ au^4$	τ^5	a ₅	Υ(τ)
0	1	2τ	$3\tau^2$	$4\tau^3$	5τ ⁴	a ₅	Υ '(τ)

(25.1)

BVP:Y(τ_1) and Y '(τ_2)

$ \begin{array}{c c} -(0.k_2 \\ + 0.k_4 \\ + k_5 \end{array} $	-(0. k ₁ + 1.k ₃)	-(2.k ₀)	0	$(12k_2 + 4k_4 + k_5)$ $(-t_i^5)$)/ $(-5 t_i)$	$(20k_1 + 5k_3)$ $(-t_i^5))/$ $(-5 t_i)$	$\mathbf{a}_{_{0}}$		$k_6 + \alpha_0 - \alpha_4 - (-t_i^5)/(-5t_i)$
0	$-(0.k_{2} + 1.k_{4} + k_{5})$	-(2.k ₁ + 2.k ₃)	-(6.k ₀)	$((12k_{2}^{1} + 4k_{4} + k_{5}) + (5t_{i}^{4}))/$ $(-5t_{i})$	$(20k_1^{'} +5k_5^{'})$ $(5 t_1^{4})/$ $(-5 t_1^{'})$	a ₁		$\begin{array}{c c} \boldsymbol{\alpha}_1 - \boldsymbol{\alpha}_4 (5 t_i^4) \\ (-5 t_i) \end{array}$
0	0	-(2.k ₂ + 2.k ₄ + k ₅)	-(6. k ₁ + 3.k ₃)	$-(12.k_0) + (12k_2 + 4k_4 + k_5)) $ $(-10 t_i^3)/$ $(-5 t_i)$	$(20k_1 + 5k_5)$ $(-10 t_i^3)$ $/(5t_i)$	a ₂	=	$\alpha_2 - \alpha_4 (-10 t_i \\ \wedge 3) (-5 t_i)$
0	0	0	-(6.k ₂ + 3.k ₄ + k ₅)	$ \begin{array}{l} -(12.k_1 \\ + 4.k_3) + \\ (12k_2 + \\ 4k_4 + k_5) \\ (10 t_i^2)/\\ (-5 t_i) \end{array} $	-(20k0) + (20k ₁ + 5 k ₅) (10 t _i ²)/ (-5t _i)	a ₃		$\alpha_3 - \alpha_4 (10 t_i^2)$ (-5 t _i)
1	$\tau_{_1}$	τ_1^2	τ_1^3	$ au_{_1}{}^4$	$ au_1^{5}$	a ₅		$Y(\tau_{_{1}})$
0	1	$2\tau_2$	$3 au_2^2$	$4 au_2^{3}$	5 τ ₂ ⁴	a ₅		Υ '(τ ₂)

(25.2)

$BVP:Y(\tau_1)$	and	$Y(\tau_2)$
-----------------	-----	-------------

$ \begin{array}{c} -(0.k_2 \\ + 0.k_4 \\ + k_5) \end{array} $	-(0. k ₁ + 1.k ₃)	-(2. k ₀)	0	$(12k_2 + 4k_4 + k_5)$ $(-t_i^{5})$ // $(-5 t_i)$	$(20k_1 + 5k_3)$ $(-t_i^{5})$ // $(-5 t_i)$	a ₀		$k_6 + \alpha_0 - \alpha_4(-t_i^5)/(-5t_i)$
0	$-(0.k_{2} + 1.k_{4} + k_{5})$	-(2. k ₁ + 2.k ₃)	-(6.k ₀)	$((12k_{2}^{1} + 4k_{4} + k_{5}) (5 t_{1}^{4}))/$	(20k ₁ +5k ₅)	a ₁		$\boldsymbol{\alpha}_{1} - \boldsymbol{\alpha}_{4} (5 t_{i}^{4}) $ $(-5 t_{i})$
0	0	-(2.k ₂ + 2.k ₄ + k ₅)	k ₁ +	$-(12.k_0) + (12k_2 + 4k_4 + k_5))(-10 + t_1^3)/(-5 + t_2)$	$(20k_1 + 5k_5)$ $(-10 t_i^3)$ $/(5t_i)$	a ₂	=	$\alpha_{2} - \alpha_{4}(-10 t_{i} ^{\wedge} 3) (-5 t_{i})$
0	0	0	-(6.k ₂ + 3.k ₄ + k ₅)	$-(12.k_{1} + 4.k_{3}) + (12k_{2} + 4k_{4} + k_{5}) + (10 t_{i}^{2}) / (-5 t_{i})$	-(20k0) + (20k ₁ + 5 k ₅) (10 t _i ²)/ (-5t _i)	a ₃		$\boldsymbol{\alpha}_{3} - \boldsymbol{\alpha}_{4}(10 t_{i}^{2})$ $(-5 t_{i})$
1	$\tau_{_1}$	τ_1^2	τ_1^3	τ_1^4	$\tau_{_1}^{_5}$	a ₅		$Y(\tau_{_{1}})$
1	$\tau_{_2}$	τ_2^2	$\tau_2^{\ 3}$	$\tau_2^{\ 4}$	τ_2^{5}	a ₅		Υ(τ ₂)

(25,3)

 $(a_5 a_5)]$

A closer observation on the sample simulation matrices show certain similar trends that can lead to generalization and extension to higher order and matrix size. Thus a spreadsheet program has been developed by the authors for handling higher order ODE's and matrix size.

Non-Linear ODE's

The analyses here follow the same pattern as the linear case explained in the previous section. Thus let us illustrate by converting the general second order linear ODE of eq3 into second order non linear form by making the y-coefficient variable in the dependent variable as highlighted in eq.26:

$$(k_0 + k_1 t + k_2 t^2) d^2 Y / dt^2 + (k_3 + k_4 t) dY / dt + (k_5 + k_6 Y) Y + f(t) + k_7 = 0$$
 (26)

Eq.26 is a second order nonlinear ODE. Thus by following similar regression procedure as explained in the linear cases, the resulting equation(for the sample case of n=5) is:

$$[2k_{_{0}}a_{_{2}}+k_{_{3}}a_{_{1}}+k_{_{5}}a_{_{0}}+k_{_{6}}(a_{_{0}}a_{_{0}})+k_{_{7}}+\boldsymbol{\alpha}_{_{0}}]=k_{_{6}}(a_{_{5}}a_{_{5}})\ (t_{_{i}}^{\ 10})\ (27.1)$$

$$[6k_0a_3 + (2k_1 + 12k_3)a_2 + (k_4 + k_5)a_1 + k_6(a_0a_1 + a_1a_0) + \boldsymbol{\alpha}_1] = k_6(a_5a_5)$$
 (-10t°) (27.2)

$$[12k_0a_4 + (6k_1 + 3k_3)a_3 + (2k_2 + 2k_4 + k_5)a_2 + k_6(a_0a_2 + a_1a_1 + a_2a_0) + \boldsymbol{\alpha}_2]$$

= $k_6(a_5a_5) (45t^8) (27.3)$

$$\begin{aligned} \{k_{2} \left[20k_{0}a_{5} + (12k_{1} + 4k_{3})a_{4} + (6k_{2} + 3k_{4} + k_{5})a_{3} + k_{6}(a_{0}a_{3} + a_{1}a_{2} + a_{2}a_{1} + a_{3}a_{0}) + \boldsymbol{\alpha}_{3} \right] \\ &= k_{c}(a_{c}a_{c}) \left(-120t^{7} \right) (27.4) \end{aligned}$$

$$\begin{aligned} & \left[(20k_1 + 5k_3)a_5 + (12k_2 + 4k_4 + k_5)a_4 + k_6(a_0a_4 + a_1a_3 + a_2a_2 + a_3a_1 + a_4a_0) \right. \\ & + \left. \boldsymbol{\alpha}_4 \right] \\ & = k_6(a_5a_5) \left(210t^6 \right) \left(27.5 \right) \\ & \left[(20k_2 + 5k_4 + k_5)a_5 + k_6(a_0a_5 + a_1a_4 + a_2a_3 + a_3a_2 + a_4a_1 + a_5a_0) + \boldsymbol{\alpha}_5 \right] \\ & = k_6(a_5a_5) \left(-252t^5 \right) \left(27.6 \right) \end{aligned}$$

$$k_6(a_1a_5 + a_2a_4 + a_3a_3 + a_4a_2 + a_5a_1) = k_6(a_5a_5) (210t^4) (27.7)$$

$$k_6(a_2a_5 + a_3a_4 + a_4a_3 + a_5a_5) = k_6(a_5a_5) (-120t^3) (27.8)$$

$$k_{6}(a_{3}a_{5} + a_{4}a_{4} + a_{5}a_{3}) = k_{6}(a_{5}a_{5}) (45t^{2}) (27.9)$$

$$k_6(a_4a_5 + a_5a_4) = k_6(a_5a_5) (-10t) (27.10)$$

Thus we have ten equations (eqs. 27.1 to 27.10) with six unknowns (a_0 --- a_5). Boundary conditions will also supply more equations. For instance two boundary conditions will add additional two equations, making a total of twelve. Following the usual procedure, we need to modify eq. 27 set so as to match the number of unknowns. Instead of merging /combining, we need to adopt a less cumbersome and easily programmable technique of defining new variables so as to match the number of equations. Thus by dividing eqs. 27.1 to 27.9 by eq. 27.10 followed by dividing eqs. 27.6 to 27.10 only with a_5a_5 and defining $c_5=a_5/a_5$, $c_4=a_4/a_5$, $c_3=a_3/a_5$, $c_2=a_2/a_5$, $c_1=a_1/a_5$, $c_0=a_0/a_5$, eqs. 27 set now becomes:

$$[2k_{_{0}}a_{_{2}}+k_{_{3}}a_{_{1}}+k_{_{5}}a_{_{0}}+k_{_{6}}(a_{_{0}}a_{_{0}})+k_{_{7}}+\boldsymbol{\alpha}_{_{0}}]=k_{_{6}}(a_{_{4}}a_{_{5}}+a_{_{5}}a_{_{4}})\;(t_{_{i}}^{_{10}})\;/(-10t)$$
 (28.1)

$$[6k_0a_3 + (2k_1 + 2k_3)a_2 + (k_4 + k_5)a_1 + k_6(a_0a_1 + a_1a_0) + \boldsymbol{\alpha}_1]$$

= $k_6(a_4a_5 + a_5a_4) (-10t^9) / (-10t) (28.2)$

$$\begin{split} &[12k_{0}a_{4}+(6k_{1}+3k_{3})a_{3}+(2k_{2}+2k_{4}+k_{5})a_{2}+k_{6}(a_{0}a_{2}+a_{1}a_{1}+a_{2}a_{0})+\boldsymbol{\alpha}_{2}]\\ &=k_{6}(a_{4}a_{5}+a_{5}a_{4})(45t^{8})\:/(-10t)\:(28.3) \end{split}$$

$$\begin{split} & [20k_{0}a_{5} + (12k_{1} + 4k_{3})a_{4} + (6k_{2} + 3k_{4} + k_{5})a_{3} + k_{6}(a_{0}a_{3} + a_{1}a_{2} + a_{2}a_{1} + a_{3}a_{0}) + \pmb{\alpha}_{3}] \\ & = k_{6}(a_{4}a_{5} + a_{5}a_{4}) \; (-120t^{7}) \; / (-10t) \; (28.4) \end{split}$$

$$\begin{split} & \left[(20k_1 + 5k_3)a_5 + (12k_2 + 4k_4 + k_5)a_4 + k_6(a_0a_4 + a_1a_3 + a_2a_2 + a_3a_1 + a_4a_0) + \pmb{\alpha}_4 \right] \\ & = k_6(a_4a_5 + a_5a_4) \left(210t^6 \right) / (-10t) \left(28.5 \right) \\ & \left[(20k_2 + 5k_4 + k_5)c_5/a_5 + k_6(c_0c_5 + c_1c_4 + c_5c_3 + c_3c_2 + c_4c_1 + c_5c_0) + \pmb{\alpha}_5 \right] \end{split}$$

$$= k_{6}(c_{4}c_{5} + c_{5}c_{4}) (-252t^{5}/(-10t)) (28.6)$$

$$k_{6}(c_{1}c_{5} + c_{2}c_{4} + c_{3}c_{3} + c_{4}c_{2} + c_{5}c_{1}) k_{6}(c_{4}c_{5} + c_{5}c_{4}) (210t^{4}) / (-10t) (28.7)$$

$$k_{6}(c_{2}c_{5} + c_{3}c_{4} + c_{4}c_{3} + c_{5}c_{2}) = k_{6}(c_{4}c_{5} + c_{5}c_{4}) (-120t^{3}) / (-10t) (28.8)$$

$$k_{6}(c_{2}c_{5} + c_{4}c_{4} + c_{5}c_{3}) = k_{6}(c_{4}c_{5} + c_{5}c_{4}) (45t^{2}) / (-10t) (28.9)$$

Thus with these transformations, we now havenine equations with twelve unknows (a_0 to a_5 and c_0 to c_5) remaining three more equations to complete, which is supplied by the two boundary equations and the identity: $c_5 = 1$. Eqs.28 set are non linear algebraic equations, which can be solved by successine iterations or by newtons gradient methods via matrix algebra. Once again close observation shows trends that can lead to generalization to any order and matrix size.

Systems of differential equations

Let us illustrate the procedure by considering two simultaneous first order ODE's with constant coefficients as shown:

$$dX/dt + k_1X + k_2Y + k_3=0$$
 (29.1)
 $dY/dt + k_4X + k_5Y + k_6=0$ (29.2)

Regressing the solutions implies:

$$X = a_0 + a_1 t + a_2 t^2 + a_3 t^3 + a_4 t^4 + a_5 t^5 + \dots (30.1)$$

$$Y = b_0^{} + b_1^{} t + b_2^{} t^2 + b_3^{} t^3 + b_4^{} t^4 + b_5^{} t^5 + \dots (30.2)$$

Thus

$$dX/dt = a_1 + 2a_2t^2 + 3a_3t^2 + 4a_4t^3 + 5a_5t^4 + \dots (31)$$

$$dY/dt = b_1 + 2b_2t + 3b_3t^2 + 4b_4t^3 + 5b_5t^4 + \dots (32)$$

inserting eqs.29 to 32 into eq.28 set , expanding and marching term by term with the corresponding modified binomial coefficients leads to the following equations (for n=5):

$$\begin{aligned} a_1 + k_1 a_0 + k_2 b_0 + k_3 &= (k_1 a_5 + k_2 b_5)(-t_i^5) \ (33.1) \\ 2a_2 + k_1 a_1 + k_2 b_1 &= (k_1 a_5 + k_2 b_5)(5t_i^4) \ (33.2) \\ 3a_3 + k_1 a_2 + k_2 b_2 &= (k_1 a_5 + k_2 b_5)(-10t_i^3) \ (33.3) \\ 4a_4 + k_1 a_3 + k_2 b_3 &= (k_1 a_5 + k_2 b_5)(10t_i^2) \ (33.4) \\ 5a_5 + k_1 a_4 + k_2 b_4 &= (k_1 a_5 + k_2 b_5)(-5t_i) \ (33.5) \end{aligned}$$

$$b_1 + k_4 a_0 + k_5 b_0 + k_6 = (k_4 a_5 + k_5 b_5)(-t_i^5) (33.6)$$

$$2b_2 + k_4 a_1 + k_5 b_1 = (k_4 a_5 + k_5 b_5)(5t_i^4) (33.7)$$

$$3b_3 + k_4 a_2 + k_5 b_2 = (k_4 a_5 + k_5 b_5)(-10t_i^3) (33.8)$$

$$4b_4 + k_4 a_3 + k_5 b_3 = (k_4 a_5 + k_5 b_5)(10t_i^2) (33.9)$$

$$5b_5 + k_4 a_4 + k_5 b_4 = (k_4 a_5 + k_5 b_5)(-5t_i) (33.10)$$

Note that t_i are the values of the independent variable at the solution interval specified. Thus we have ten linear equations with twelve unknowns (a_0 to a_5 and b_0 to b_5), thus requiring two additional equations to complete. These are supplied by the boundary conditions of the problem. For the IVP where X(0) and Y(0) or X(τ) and Y(τ) are given, thus providing additional two equations, hence no modifications

are needed in the eqs.33 set. However for BVP where the equations are more than two, we need to make modifications in the eqs.33 set to accommodate all the boundary value equations, as exhaustively explained in the previous sections. Thus eqs.33 set along with the boundary value equations are solved via matrix algebra to give the solutions of the systems of ODE, that is X and Y in this case. The sample matrix is shown below (for IVP).

-k ₁	-1	0	0	0	k ₁ (-t ⁵)	-k ₂	0	0	0	0	k ₂ (-t ⁵)	a_0		k_3
0	-k ₁	-2	0	0	k ₁ (5.t ⁴)	0	-k ₂	0	0	0	k ₂ (5.t ⁴)	a ₁		k ₆
0	0	-k ₁	-3	0	k ₁ (- 10t ³)	0	0	-k ₂	0	0	k ₂ (-10t ³)	a ₂		0
0	0	0	-k ₁	-4	k ₁ (10t ²)	0	0	0	-k ₂	0	k ₂ (10t ²)	a ₃		0
0	0	0	0	-k ₁	-5 + k ₁ (-5t)	0	0	0	0	-k ₂	k ₂ (-5t)	a_4		0
-k ₄	0	0	0	0	k ₄ (-t ⁵)	-k ₅	-1	0	0	0	k ₅ (-t ⁵)	a ₅	=	0
0	-k ₄	0	0	0	k ₄ (5t ⁴)	0	-k ₅	-2	0	0	k ₅ (5t ⁴)	b _o		0
0	0	-k ₄	0	0	k ₄ (- 10t ³)	0	0	-k ₅	-3	0	k ₅ (-10t ³)	b ₁		0
0	0	0	-k ₄	0	k ₄ (10t ²)	0	0	0	-k ₅	-4	k ₅ (10t ²)	b ₂		0
0	0	0	0	-k ₄	k ₄ (-5t)	0	0	0	0	-k ₅	-5 + k ₅ (- 5t)	b ₃		0
1	0	0	0	0	0	0	0	0	0	0	0	b_4		X(0)
0	0	0	0	0	0	1	0	0	0	0	0	b ₅		Y(0)
				•							1			(34)


A closer look at the matrix equation shows trends that can lead to generalization to any matrix size. Higher orders and variable coefficients and non linear forms are equally handled as previously explained.

Applications

In this section, some chemical engineering applications are given to demonstrate the accuracy, efficiency and generality of the present method.

Unsteady continuous flow, well stirred mixer

Let us consider an unsteady continuous flow, well stirred mixer as shown in figure 1.



It is desired to find the concentration profile of the salt in the tank. The governing differential model is:

$$dC/dt + 3C/(60 + 2t) = 0.5$$
, $C(0) = 10 (35)$

We will use this example to illustrate the procedure for the new method. Equation 35 is rearranged in the general linear ODE format (eq.3) to give:

$$(60 + 2t) dC/dt + 3C - t - 30 = 0 C(0) = 10 (36)$$

This is a first order one point IVP problem(Y(0) given) of the simulation matrix type, eq. 20, thus term by term comparison of eq.37 with the general linear ODE standard expression (eq,3) implies; k_0 =0, k_1 =0, k_2 =0, k_3 =60, k_4 =2, k_5 =3, α_1 = -1, k_6 = -30, thus substitution of these k-values along with the boundary values into the simulation matrix(eq.20) results in the matr

-3	-60	0	0	0	-13(-t ⁵)	$a_{_0}$		-30
0	-5	-120	0	0	65(5t ⁴)	a ₁		-1
0	0	-7	-180	0	-130(-10t ³)	$\mathbf{a}_{_{2}}$	=	0
0	0	0	-9	-240	130(10t²)	a ₃		0
0	0	0	0	-11	-365(-5t)	a ₄		0
1	0	0	0	0	0	a ₅		10

Thus for different values of t in the solution interval specified, in this case $0 \le t \le 15$; the matrix is evaluated for the parameters, a_i , from where the corresponding values of C(t) is found.

eg. For t = 15, the matrix (eq.37) becomes:

-3	-60	0	0	0	-9871875	a_0		-30
0	-5	-120	0	0	3290625	$a_{_1}$		-1
0	0	-7	-180	0	-438750	\mathbf{a}_{2}	II	0
0	0	0	-9	-240	29250	a ₃		0
0	0	0	0	-11	-1275	$a_{_4}$		0
1	0	0	0	0	0	a ₅		10

(38)

(37)

thus, substituting these \mathbf{a}_{i} values into the regressed solution, eq.4implies:

 $C(t) = 10 + 5.27327801922824 \\ E-03 \quad t \quad +7.23473374599412 \\ E-03 \quad t^2 \quad -2.0322811946676 \\ E-04 \quad t^3 \quad +3.71492261390852 \\ E-06t^4-3.20503127474461 \\ E-08 \quad t^5 \quad (39) \ \ therefore \ \ at \quad t = 15 \ \ in \ \ this \ \ case, \ the \ \ corresponding \ C(t), \ from \ eq.39, \ is \ 11.18474911$

Similar procedure is repeated for the next matrix size (n=6) and for higher matrices until convergence.

Diffusion and first order chemical reaction in a catalyst slab

let us consider an example of diffusion and first order chemical reaction in a catalystslab

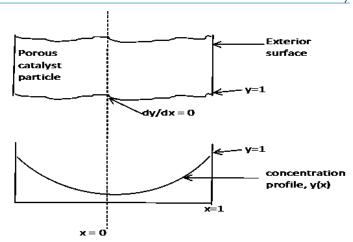


Figure 2: Diffusion and first order reaction in a catalyst slab.

The second order differential model and the boundary conditions are:

$$D_{e} d^{2}C/dr^{2}-kC = 0 (40.1)$$

$$r = 0 ;dC/dr = 0, (40.2)$$

$$r = R; C = C_{0} (40.3)$$

which in dimensionless forms are:

$$d^{2}Y/dX^{2}-\phi^{2}Y=0 \ (41.1)$$

$$X=0 \ ; dY/dX=0, \ (41.2)$$

$$X=1; \ Y=1 \ (41.3)$$

Where

$$Y = C/C_{0}$$
, $X=r/R$; $\phi^2 = kR^2/D_{e}$, $0 \le X \le 1$ (41.4)

This is a first order boundary problem, (Y(0) given) of the simulation matrix type, eq. 25.2, thus term by term comparison of eq.37 with the general linear ODE standard expression (eq,3) implies; k_0 =1, k_1 =0, k_2 =0, k_3 =0, k_4 =0, k_5 =-100, $\pmb{\alpha}_i$ =0, k_6 =0, thus substitution of these k-values along with the boundary values into the simulation matrix(eq.20) result in the matrix:

100	0	-2	0	-100(-1.X ⁵)/ (-5.X)	0	a ₀		0
0	100	0	-6.(5.X ⁴)/	-100.(5.X ⁴)/	0	a,		0
L	100		(-5.X)	(-5.X)		1		
0	0	100	0	-112.(-10.X ³)/	0	1	_	0
0	0 0 100		U	(-5.X)	0	\mathbf{a}_{2}	_	0
0	0	0	100.(10.X ²)/	-100.(10.X ²)/	-20.(10.X ²)/			0
U	U	U	(-5.X)	(-5.X)	(-5.X)	a_3		U
0	1	0	0	0	0	a ₄		0
1	1	1	1	1	1	a ₅		1
							((42)

Chemical reaction in a fixed bed

let us consider an elementary second order differential equation:

$$\begin{split} &d^2y/x^2\text{-}2dy/dx - 10y = 00 < x < 1 \text{ (43.1)} \\ &x = 1 \text{ ;} dy/dx = 0, \text{ (43.2)} \\ &x = 0; y = 1 \text{ (43.3)} \end{split}$$

This two point BVP can be used to describe a chemical reaction occurring in a fixed bed. Since this a two point boundary problem, simulation matrix eq. 25.2 amd its higher forms are used, with the eq. 43.1

parameters in comparison with the general form, (eq,3) becoming; k_0 =1, k_1 =0, k_2 =0, k_3 =-2, k_4 =0, k_5 =-10, α_1 =0, k_6 =0, thus substitution of these k-values along with the boundary values into the simulation matrix(eq.25.2) result in the sample simulation matrix for n=5:

10	2	-2	0.(-1.X ⁵)/(-5.X)	-10.(-1.X ⁵)/ (-5.X)	-10.(-1.X ⁵)/ (-5.X)	a_0		0
0	10	4	-6.(5.X ⁴)/(-5.X)	-10(5.X ⁴)/(-5.X)	-10.(5.X ⁴)/ (-5.X)	a ₁		0
0	0	10	6.(-10.X ³)/ (-5.X)	-22.(-10.X ³)/ (-5.X)	-10.(-10. X ³)/(-5.X)	a ₂	=	0
0	0	0	10(10.X ²)/ (-5.X)	-2(10.X ²)/(-5.X)	-30(10. X ²)/(-5.X)	a ₃		0
0	1	2	3	4	5	a_4		0
1	0	0	0	0	0	a ₅		1

(43.4)

Seriesreaction in a constant volume batch reactor

Let us consider a constant volume batch reactor undergoing the series the reaction sequence:

$$k_{1} k_{2}$$

$$A \rightarrow B \rightarrow C$$

For a first order kinetics, the differential equations describing the process are:

$$dC_{A}/dt = -k_{1}C_{A} (44.1)$$

$$dC_{p}/dt = k_{1}C_{A} - k_{2}C_{p} (44.2)$$

By including the coefficients and rearranging in standard format (eqs.28 set), eqs.44 set become:

$$dC_{A}/dt+2C_{A} = 0 (45.1)$$

$$dC_{p}/dt -2C_{A} + 3C_{p} = 0 (45.2)$$

and term by term comparisons implies: $k_1=2,\ k_2=0,\ k_3=0,\ k_4=-2,\ k_5=3,\ k_6=0;$ thus substitution of these k-values along with the boundary values into the simulation matrix (eq.34) and its extensions, result in the sample simulation matrix for n=5:

-2	-1	0	0	0	2.(-1.t ⁵)	0	0	0	0	0	$0.(-1.t^5)$	a ₀		0
0	-2	-2	0	0	2.(5.t ⁴)	0	0	0	0	0	0.(5.t ⁴)	a ₁		0
0	0	-2	-3	0	2.(-10.t ³)	0	0	0	0	0	$0.(-10.t^3)$	a_2		0
0	0	0	-2	-4	2.(10.t ²)	0	0	0	0	0	0.(10.t ²)	a ₃		0
0	0	0	0	-2	-5 + 2.(- 5.t)	0	0	0	0	0	0.(-5.t)	a ₄		0
2	0	0	0	0	2.(-1.t ⁵)	-3	-1	0	0	0	3.(-1.t ⁵)	a ₅	=	0
0	2	0	0	0	2.(5.t ⁴)	0	-3	-2	0	0	3.(5.t ⁴)	b _o		0
0	0	2	0	0	2.(-10.t ³)	0	0	-3	-3	0	3.(-10.t ³)	b ₁		0
0	0	0	2	0	2.(10.t ²)	0	0	0	-3	-4	3.(10.t ²)	b_2		0
0	0	0	0	2	-2.(-5.t)	0	0	0	0	-3	-5 + 3. (-5.t)	b_3		0
1	0	0	0	0	0	0	0	0	0	0	0	b_4		1
0	0	0	0	0	0	1	0	0	0	0	0	b ₅		0

Second order chemical reaction in a plug flow reactor

Let us consider a second order chemical reaction in a plug flow reactor(with no axial dispersion) as shown in figure 3 (Rice and Do, 1995).

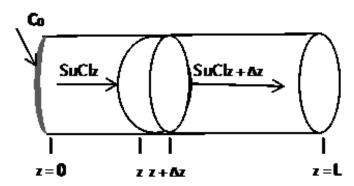


Figure 3: Schematic diagram of the plug flow reactor.

Thus the nonlinear differential model governing the formation of a product(with no axial dispersion) is as follows

udC/dz =
$$kC^2$$
 z= 0; C = C_0 (47)
where k=1; u=1 and C_0 =1; $0 \le z \le 0.9$
rearranging in standard format of eq.26 implies:

$$udC/dz - kC^2 = 0 (48)$$

Thus term by term comparison of stabdard nonlinear eq.26 with eq.48 implies: $k_0 = 0$; $k_1 = 0$; $k_2 = 0$; $k_3 = 1$; $k_4 = 0$; $k_5 = 0$; $k_6 = -1$; f(t) = 0; $k_7 = 0$

To illustrate the new procedure, eq.48 is a non linear first order differential equation. Thus using eq.27 set and following the usual procedure, the nonlinear ODE is solved using Newton's gradient method.

Diffusion and reaction in a porous spherical catalyst pellet

Finally, let us consider an important problem in chemical engineering: to predict the concentration profile for a diffusion andreaction in a porous spherical catalyst pellet, hence the overall reactionrate of the catalyst pellet. The variable coefficient differential model is:

D [
$$1/r^2 d/dr(r^2 dc/dr)$$
] =k f(c) , $0 < r < r_p (49)$ where

r = radial coordinate (r = pellet radius)

D = diffusivity

c = concentration of the given chemical specie

k = rate constant

f(c) = reaction rate function

with

(46)

dc/dr = 0 at r = 0 (symmetry about the origin)

 $c = c_0$ at $r = r_p$ (concentration fixed at surface)

for an isothermal first order case, eq.50;in dimensionless form becomes:

$$d^{2}C/dR^{2} + 2/R dC/dR = \varphi^{2} C; 0 < R < 1$$
 (50)

with the boundary conditions:

dC/dR=0 at R =0 (51.1)

C=1 at R=1 (51.2)

Where thele modulus, φ , is:

$$\varphi = r_p(k/D)^{1/2}$$
 (51.3)

To simulate with the new generalized procedure, eq. 50 is first arranged in standard format as follows:

$$R d^{2}C/dR^{2} + 2 dC/dR - \varphi^{2}RC = 0$$
 (52)

For the case where ϕ =2.236, the coefficients are k_0 = 0; k_1 = 1; k_2 = 2; k_3 = 0; k_4 = 0; k_5 = -(2.236²); k_6 = 0; k_7 = 0; and the sample simulation matrix (n=5) becomes:

-k ₄	-k ₂	-(2.k ₀)	k ₅ .(t ⁶)/(15. R ²)	$(4.k_3 + k_4)$. $(R^6)/(15$. $R^2)$	$(20.k_1 + 5.k_2)(R^6)/$ $(15.R^2)$	a ₀		k ₇
-k ₅	-(k ₃ + k ₄)	-(2.k ₁ + 2.k ₂)	$-(6.k_0) + k_5(6R^5)/$ $(15R^2)$	$(4.k_3 + k_4)$ $(-6.R^5)/(15.$ $R^2)$	$(20.k_1 + 5.k_2)$ $(-6.R^5)/(15.R^2)$	a ₁		k ₆
0	-k ₅	-(2.k ₃ + k ₄)	$-(6.k_1 + 3.k_2) + k_5.(15.R^4)/$ $(15.R^2)$	$-(12.k_0) + (4.k_3 + k_4).$ $(15.R^4)/$ $(15.R^2)$	$(20.k_1 + 5.k_2).$ $(15.R^4)/(15.R^2)$	a ₂	=	0
0	0	-k ₅	$-(3.k_3 + k_4) + k_5. (20.R^3)/(15.R_2)$	$-(12.k_1 + 4.k_2) + (4.k_3 + k_4).$ $(-20.R^3)/$ $(15.R_2)$	$-(20.k_0) + (20.k_1 + 5.k_2)(-20.R^3)/$ $(15.R_2)$	a ₃		0
0	1	0	0	0	0	a ₄		0
1	1	1	1	1	1	a ₅		1

(53)

Thus substituting the values of k's and solving the matrix eq,53 and the corresponding higher matrices within the solution interval, until convergence.

Thus in all the above cases, the matrixes are evaluated for the coefficients, a_is from where the solution of the ODE,Y is found by substituting into eq.4. The procedure is repeated for higher matrices until convergence, that is when there is no more significant different between the values ofY for two adjacent matrices, signifying the solution of the differential equation.All calculations are carried out by the spreadsheet programs developed by the authors.

Results and Discussion

Tables 1 to 6 show the results of the new method for varying chemical and process engineering applications. As observed, the new method gave the accurate results when compared with the exact (analytical) solutions, as can be seen from the absolute error, which is the absolute difference between the new method and the actual solution. Furthermore, the convergence is faster, since generally the solution converges on or before the matrix size, N=45, as compared with other numerical techniques (Table 7), which requires much higher matrix/grid size, N to get closer to the actual solution. Finally the general convergence sequence of the new method, shown in table 8 and illustrated in figure 4 ensures that the method always converges to the solution, and does not have problems of overshoot andis free from rounding off errorsencountered in the other methods. Above all the new method is a generalized approach since as can be seen; a wide-range of chemical and process engineering problems are solved using the same

Table 1: Comparison of exact solution with the simulated values for 1st order IVP eq.35.

{Unsteady continuous flow, well stirred mixer}

t, min	Exact/ Analytical solution $C(t) = (60 + 2t)/10 + 4(60^{3/2})(60 + 2t)^{-3/2}$	Simulated C(t)	matrix size at convergence	absolute error
0	10	10	6	0
1	10.00802098	10.00802098	6	4.32151E-09
2	10.03092189	10.03092188	8	4.81428E-09
3	10.06713669	10.06713669	10	1.33983E-09
4	10.11530507	10.11530507	11	3.21667E-09
5	10.17424034	10.17424034	12	6.31168E-09
6	10.2429031	10.24290311	13	1.1358E-08
7	10.32037947	10.32037948	15	4.7771E-09
8	10.40586311	10.4058631	16	9.47699E-09
9	10.49864006	10.49864008	17	1.87691E-08
10	10.59807621	10.59807617	19	3.75862E-08
11	10.7036066	10.7036064	19	2.03779E-07
12	10.81472644	10.81472549	19	9.52106E-07
13	10.93098345	10.93097952	19	3.92636E-06
14	11.05197134	11.05195678	19	1.45594E-05
15	11.17732422	11.17727495	19	4.92657E-05

Table 2: Comparison of exact solution with the simulated values for 2nd order BVP eq.41.

{ DIffusion and first order chemical reaction in a catalyst slab: }

	ExactY(X)		matrix	
X	$Y = \cosh(10X)/$	Simulated YXt)	size at	Absolute error
	cosh(10)		convergence	
0.1	0.000140112	0.000140202	21	9.01968E-08
0.2	0.000341607	0.000341635	23	2.84627E-08
0.3	0.000914142	0.00091421	23	6.78325E-08
0.4	0.002479584	0.002479608	25	2.44105E-08
0.5	0.006738253	0.006738276	26	2.26291E-08
0.6	0.018315751	0.018315773	27	2.11771E-08
0.7	0.04978711	0.049787129	28	1.8919E-08
0.8	0.135335298	0.135335315	29	1.63902E-08
0.9	0.367879446	0.367879486	29	4.02786E-08
1	1	1	6	2.22045E-16

procedure/platform. Thus the new method is efficient, computationally inexpensive, accurate and general.

Conclusion

In this work, a new generalized computational technique was developed (and illustrated) for solving differential equations (both initial and boundary value problems) in chemical and process engineering. This follows the realization that any differential expression can be regressed by the least square method and the coefficients of the regressed model linked to that of the binomial formula. Thus a generalized simulation matrix was developed for solvinga wide-rangedifferential equations

Table 3: Comparison of exact solution with the simulated values for 2nd order BVP eq.43. {Chemical reaction in a fixed bed).

X	Exact Y(x) (Rice and Do, 1995)	Simulated Y(x)	matrix size at convergence	Absolute error
0.1		0.793740702	15	
0.2	0.630417	0.630417398	15	3.98E-07
0.3		0.501305011	16	
0.4	0.399566	0.39956567	16	3.3E-07
0.5		0.319903016	16	
0.6	0.258312	0.258312402	17	4.02E-07
0.7		0.211919956	17	
0.8	0.178912	0.178911947	17	5.3E-08
0.9		0.158567132	18	
1	0.151418	0.151418212	18	2.12E-07

Table 4: Comparison of exact solution with the simulate d values $forC_A$ and C_B in eq. set 44. {Series reaction in a constant volume batch reactor}.

t	Exactsolution $C_A = e^{-2t}$	Simulated $C_{_{\rm A}}$ (t)	matrix size at convergence	Absolute error	Exactsolution $C_{B} = 2e^{-2t} \{1 - (e^{-2t})\}$	Simulated $C_{B}(t)$	matrix size at convergence	Absolute error
0.1	0.818730753	0.8187308	6	2.48E-09	0.155825065	0.155825068	7	3.02E-09
0.2	0.670320046	0.67032	8	6.95E-10	0.24301682	0.243016823	9	3.10E-09
0.3	0.548811636	0.5488116	9	1.58E-09	0.284483953	0.284483954	11	1.09E-09
0.4	0.449328964	0.449329	10	2.02E-09	0.296269504	0.296269501	12	3.15E-09
0.5	0.367879441	0.3678794	11	1.94E-09	0.289498562	0.289498568	13	6.06E-09
0.6	0.301194212	0.3011942	12	1.58E-09	0.271790647	0.271790638	14	9.25E-09
0.7	0.246596964	0.246597	13	1.17E-09	0.248281071	0.24828107	16	1.51E-09
0.8	0.201896518	0.2018965	13	7.46E-09	0.222357129	0.222357131	17	1.93E-09
0.9	0.165298888	0.1652989	14	4.63E-09	0.196186751	0.196186749	18	2.27E-09
1	0.135335283	0.1353353	15	2.80E-09	0.17109643	0.171096432	19	2.51E-09

 $\label{eq:Table 5: Comparison of exact solution with the simulated values for C (z) in eq.48. \\ (Second order chemical reaction in a plug flow reactor).$

z	Exactsolution (eq. 49)	Simulated C (z)	matrix size at convergence	Absolute error
0.1	0.155825065	0.155825068	7	3.02493E-09
0.2	0.24301682	0.243016823	9	3.10372E-09
0.3	0.284483953	0.284483954	11	1.09387E-09
0.4	0.296269504	0.296269501	12	3.14708E-09
0.5	0.289498562	0.289498568	13	6.06374E-09
0.6	0.271790647	0.271790638	14	9.24747E-09
0.7	0.248281071	0.24828107	16	1.51027E-09
0.8	0.222357129	0.222357131	17	1.93307E-09
0.9	0.196186751	0.196186749	18	2.27169E-09
1	0.17109643	0.171096432	19	2.50546E-09

Table 6: Comparison of exact solution with the simulated values for C(R) in eq. 51 set. (Diffusion and reaction in a porous spherical catalyst pellet).


R	Exactsolution C = $sinh(\phi R) / [R sinh(\phi)]$	Simulated C (R)	matrix size at convergence	Absolute error
0.1	0.487553585	0.487553585	21	1.09387E-09
0.2	0.499792549	0.499792549	22	3.14708E-09
0.3	0.520600465	0.520600465	23	6.06374E-09
0.4	0.550607224	0.550607224	24	9.24747E-09
0.5	0.590726138	0.590726138	25	6.06374E-09
0.6	0.642186889	0.642186889	26	9.24747E-09
0.7	0.706580044	0.706580044	27	1.51027E-09
0.8	0.78591491	0.78591491	28	1.93307E-09
0.9	0.882692998	0.882692998	29	2.27169E-09
1	1	1	30	2.22045E-16

Table 7: Comparison of other numerical techniques with the new method for:dY/dt = -25Y, Y(0) = 1.

		Second-Order Runge-Kutta Method		Runge-Kutta-Gill Method		Euler Method		New Method	
t	Analytical Solution	N = 100	N = 800	N = 100	N = 800	N = 100	N = 800	θ	N
0	1	1	1	1	1	1	1	1	6
0.2	6.74E-03	7.17E-03	6.74E-03	6.74E-03	6.74E-03	3.17E-03	6.22E-03	0.00674	37
0.4	4.54E-05	5.15E-05	4.55E-05	4.54E-05	4.54E-05	1.01E-05	3.87E-05	4.54E-05	45
0.6	3.06E-07	3.69E-05	3.07E-07	3.06E-07	3.06E-07	3.19E-08	2.41E-07	3.06E-07	45

Table 8: Convergence resultsfor C at $t = 15 \text{ min for} 1^{st}$ order IVP eq.35. { Unsteady continuous flow, well stirred mixer }.

matrix size,n	C(t=15) values
5	11.18474911
6	11.05810588
7	11.24139402
8	11.14320374
9	11.19536734
10	11.16783655
11	11.18229021
12	11.17473489
13	11.17866995
14	11.17662674
15	11.17768483
16	11.17713815
17	11.17742004
18	11.17727495
19	11.17727495

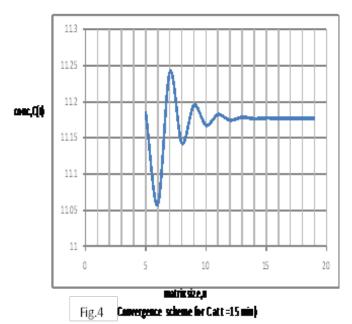

of any order and forms. Both initial and boundary value problems are treated using the same procedure, so also are the differential models arising from them and include:, homogeneous/non-homogeneous, linear/non-linear , constant/variable coefficients, $1^{st},2^{nd}$ or higher orders, and systems of simultaneous differential equationsboth for Ordinary and partial differential equations. In this first publication, ordinary differential equations were illustrated. In subsequent articles, we extend the new method to partial differential equations.

References

- de Oliveira ORB (2013) "A formula substituting the undetermined coefficients and the annihilator methods". Int. J. Math. Educ. Sci. Technol. 44: 462–468.
- D. Polyanin, ZaitsevVF(2003) Handbook of Exact Solutions for Ordinary Differential Equations, (2nd Edn), Chapman & Hall/CRC Press, Boca Raton.
- 3. Teschl, Gerald (2012) Ordinary Differential Equations and Dynamical Systems. Providence: American Mathematical Society.
- 4. Butcher, John C (2003) Numerical Methods for Ordinary Differential Equations, New York: John Wiley & Sons.
- 5. Stoer, Josef; Bulirsch, Roland (2002) Introduction to Numerical Analysis (3rd ed.), Berlin, New York: Springer-Verlag.
- serles, Arieh (1996) A First Course in the Numerical Analysis of Differential Equations, Cambridge University Press, ISBN 978-0-521-55655-2— the most basic method for solving an ODE
- Süli, Endre; Mayers, David (2003) An Introduction to Numerical Analysis, Cambridge University Press, ISBN 0521007941 — secondorder implicit method;
- Christian Grossmann, Hans-G. Roos, Martin Stynes (2007) Numerical Treatment of Partial Differential Equations. Springer Science & Business Media. ISBN 978-3-540-71584-9; 1 2
- 9. Hoffman JD; Frankel S (2001) Numerical methods for engineers and scientists. CRC Press, Boca Raton.
- 10. Majumdar P (2005) Computational methods for heat and mass transfer (1st edn).
- 11. Taylor and Francis, New York.' Smith GD (1985) Numerical solution of partial differential equations: finite difference methods (3rd edn) Oxford University Press.

- K.W. Morton and D.F. Mayers (2005) Numerical Solution of Partial Differential Equations, An Introduction. Cambridge University Press.
- 13. John Strikwerda (2004) Finite Difference Schemes and Partial Differential Equations (2nd edn). SIAM. ISBN 978-0-89871-639-9,
- Randall J. LeVeque, Finite Difference Methods for Ordinary and Partial Differential Equations,, SIAM, 2007, Peter Olver (2013) Introduction to Partial Differential Equations. Springer. Chapter 5: Finite differences. ISBN 978-3-319-02099-0.
- 15. Reddy JN (2006) An Introduction to the Finite Element Method (Third edn) McGraw-Hill. ISBN 9780071267618.
- Zienkiewicz OC, TaylorRL, Zhu JZ (2005) The Finite Element Method: Its Basis and Fundamentals (Sixth ed.). Butterworth-Heinemann. ISBN 0750663200.
- 17. Bathe KJ (2006) Finite Element Procedures. Cambridge, MA.
- Klaus-Jürgen Bathe. ISBN 097900490X Babuška, Ivo; Banerjee, Uday; Osborn, John E. (June 2004). "Generalized Finite Element Methods: Main Ideas, Results, and Perspective". International Journal of Computational Methods. 1: 67–103.
- 19. Rudolf Freund William Wilson Ping Sa, "Regression Analysis", Academic Press, ISBN: 9780080522975, (2nd Edn), March 2000.
- Douglas C Montgomery, Elizabeth APeck, G Geoffrey Vining; "Introduction to Linear Regression Analysis", (5th Edn) April 2012, ISBN. 978-0-470-54281-1.

Submit your manuscript to a JScholar journal and benefit from:

- Convenient online submission
- Rigorous peer review
- Immediate publication on acceptance
- Open access: articles freely available online
- High visibility within the field
- Better discount for your subsequent articles

Submit your manuscript at http://www.jscholaronline.org/submit-manuscript.php